



Welcome to Cert007 - Your Ultimate IT Certification Partner



➤ Real Exam Questions

➤ Free Updates

➤ Expert Support

➤ Instant Access

➤ Money-Back Guarantee




Visit us at <https://www.cert007.com/> for more information

Exam : FCP_FMG_AD-7.4

**Title : FCP - FortiManager 7.4
Administrator**

Version : DEMO

1.Exhibit.

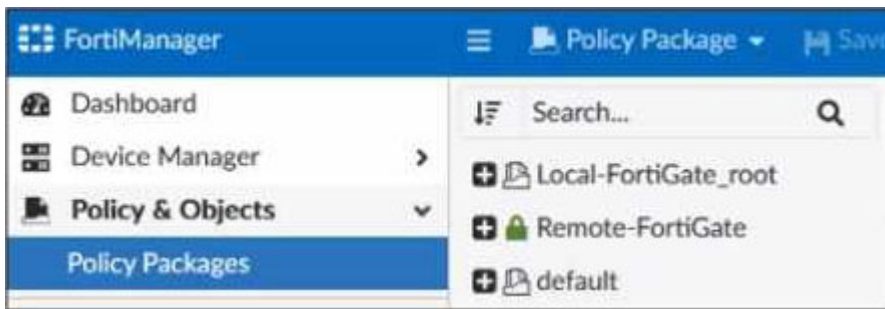

Given the configuration shown in the exhibit, which two statements are true? (Choose two.)

- A. An administrator can also lock the Local-FortiGate_root policy package.
- B. FortiManager is in workflow mode.
- C. The FortiManager ADOM is locked by the administrator.
- D. The FortiManager ADOM workspace mode is set to Normal

Answer: A, B

2.An administrator enabled workspace mode and now wants to delete an address object that is currently referenced in a firewall policy.

Which two results can the administrator expect? (Choose two.)

- A. FortiManager will temporarily change the status of the referenced firewall policy to disabled.
- B. FortiManager will disable the status of the address object until the changes are installed.
- C. FortiManager will not allow the administrator to delete a referenced address object until they lock the ADOM.
- D. FortiManager will replace the deleted address object with the none address object in the referenced firewall policy.

Answer: C, D

3.What is the purpose of ADOM revisions?

- A. To save the current state of the whole ADOM
- B. To save the current state of all policy packages and objects for an ADOM
- C. To revert individual policy packages and device-level settings for a managed FortiGate
- D. To save the FortiManager configuration in the System Checkpoints

Answer: B

4.Refer to the exhibit.

Edit Address

Category: Address

Name: LOCAL_SUBNET

Color: Change

Type: Subnet

IP/Netmask: 192.168.1.0/255.255.255.0 Resolve from name

Interface: any

Static Route Configuration: ☐

Comments:

Add To Groups:

Advanced Options >

Per-Device Mapping ▾

[+ Create New](#) [Edit](#) [Delete](#)

<input type="checkbox"/>	Mapped Device ⇅	Details ⇅
<input type="checkbox"/>	Local-FortiGate [root]	IP/Netmask: 192.168.1.0,255.255.255.240

An administrator has created a firewall address object that is used in multiple policy packages for multiple FortiGate devices in an ADOM.

After the installation operation is performed, which IP/netmask is shown on FortiManager for this firewall address object for devices without a Per-Device Mapping set?

- A. FortiManager generates an error for each FortiGate without a per-device mapping defined for that object.
- B. 192.168.1.0/24
- C. 192.168.1.0/28
- D. FortiManager replaces the address object to none.

Answer: C

5.Exhibit.

```
FortiManager # diagnose dvm device list
--- There are currently 1 devices/vdoms managed ---
--- There are currently 1 devices/vdoms count for license ---
```

TYPE	OID	SN	HA	IP	NAME	ADOM	IPS	FIRMWARE
fmgfaz-managed	325	FGVM010000077646	-	10.0.1.200	ISFW	ADOM2	6.00741 (regular)	7.0 MR4 (2463)

```

|- STATUS: dev-db: modified; conf: in sync; cond: pending; dm: retrieved; conn: up
|- vdom:[3]root flags:1 adom:ADOM2 pkg: [imported]ISFW

```

Which two statements about the output are true? (Choose two.)

- A. The latest revision history for the managed FortiGate does not match the device-level database.
- B. Configuration changes have been installed on FortiGate, which means the FortiGate configuration has been changed.

C. Configuration changes directly made on FortiGate have been automatically updated to the device-level database.

D. The latest revision history for the managed FortiGate does match the FortiGate running configuration.

Answer: A, D